



RE RACKBULL XL BOPLAN FLEX IMPACT SPECIFICATION

Revision: 2 May 2017 1:58 PM

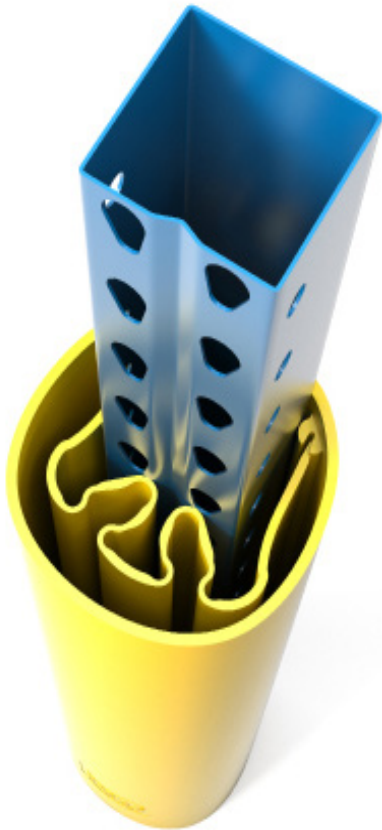

PRODUCT SPECIFICATIONS

SIZE	
Height protection	600 mm
Width	146 mm
Depth	150 mm
Weight	2030 gram
MATERIAL	
RackBull	HDPE
Manufactured	Made in EU
COLORS	
RackBull	Yellow (other colors on request)
USAGE	
Working Temperatures	-10°C up to +40°C
PACKAGING	
Box	4 pcs. (9kg)
Pallet	160 pcs.

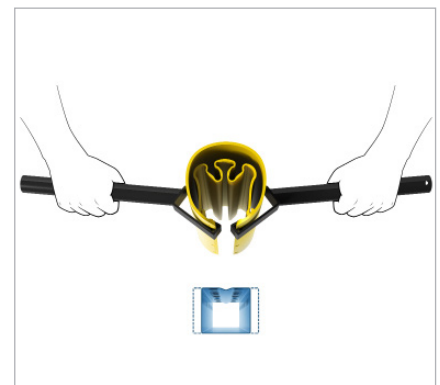

FEATURES AND FUNCTIONALITY

APPLICATION	
Protection	Optimal protection of the uprights of pallet racking systems for manoeuvring fork lifts.
Advantages	By deformation of its shape, the RackBull absorbs impacts. After deformation, the rackbull comes back to its original shape. Possible to put multiple Rackbulls on top of each other
Maintenance	Clean dust with damp cloth. Clean grease stains with household detergent.
IMPACT RESISTANCE	
Tested	A metal blade of 40 kg falls from one meter height on the Rackbull assembled on a pallet upright. After the impact, the metal rack cannot show a deformation of more than 3 mm.
Certification	TÜV NORD Voluntary Test according to DIN EN 15512 chapter 6.4.1 / 1326KU01460

REQUIREMENTS	
Rack Upright Max. Width	110 mm
Rack Upright Min. Width	75 mm
Rack Upright Max. Depth	80 mm
Rack Upright Min. Depth	70 mm
OPTIONAL	
Installation Kit	for large installations (>50 pcs.)
Installation Straps	prevents possible detachment due to receding forklift movement
APPENDIX	
Test Report	Available
Technical Drawing	Available
Installation Sheet	Available

