SPECSHEET





SAFETY GATE CLOSING BLOCK - BLACK - SET OF 2 BOPLAN FLEX IMPACT SPECIFICATION

Revision:6 June 2017 9:52 AM Boplan reference: SG1010/0104

PRODUCT	SPECIFICATIONS	
INCOUL	JILCHICAHONJ	

SIZE		
Outer dimension	56 mm x 70 mm x 8 mm	
Fixations	6 Bolts BZK M6x25	
Weight (Full Set)	74g	
MATERIAL		
Closing Block	Polyolefin - UV resistant	
Bolts	Galvanised Steel	
COLORS		
Closing Block	Black	
Bolts	Black	
USAGE		
Environment	Indoor use only	
Working Temperatures	-20°C up to +40°C	

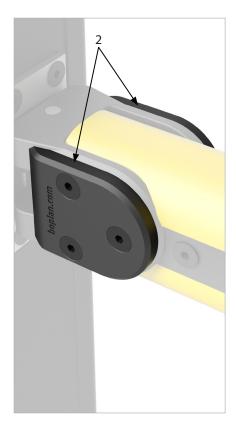

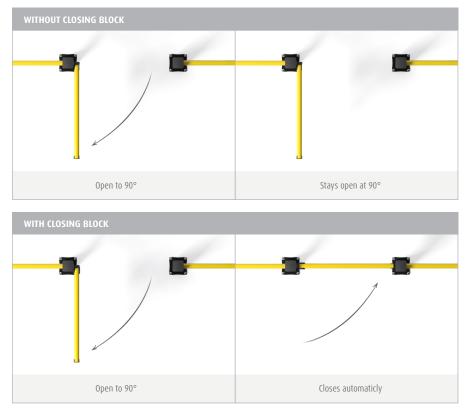




FEATURES AND FUNCTIONALITY

APPLICATION	
Automatic closing	The Closing block prevents the SG Swing gate from remaining open when opened 90° or more.
Advantages	Can be retro-fit to an existing Swing Gate. Impervious to most chemical products.
Maintenance	Clean dust with damp cloth. Clean grease stains with household detergent.

REQUIREMENTS	
Boplan Safety Gate	Compatible with SG Swing Gate only.
APPENDIX	
Technical Drawing	Available
Installation Sheet	Available





SPECSHEET 2

Boplan bvba Head Office | Muizelstraat 12, 8560 Moorsele, Belgium | +32 56 20 64 20 | sales@boplan.com | www.boplan.com

DISCLAIMER: ALL PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. © Boplan, the Boplan logo, Flex Impact and RackBull are trademarks of Boplan byba. All other trademarks are property of their respective owners.