




WS WHEELSTOP BOPLAN FLEX IMPACT SPECIFICATION SHEET

Boplan reference: WS - ...

Revision: 28 April 2021 11:33 AM

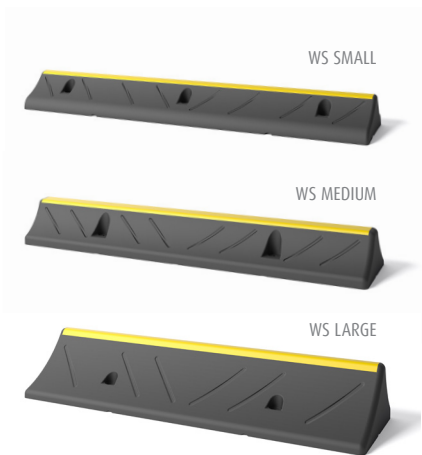

PRODUCT SPECIFICATIONS			
APPLICATION			
Environment	The Wheel Stop is designed to be installed in parking spaces. The yellow top edge gives optimal visibility. The rear side is designed to pull vehicles back when override. Very robust solution.		
Operational temperature	-50°C up to +60°C		
MATERIAL			
composition	100% made from recycled tyres.		
Exposure to light	UV resistant		
STANDARD COLORS			
	Black with yellow highlight line.		
SIZE AND PROPERTIES			
	SMALL	MEDIUM	LARGE
Dimensions	Width: 1000 mm Depth: 140 mm Height: 75 mm	Width: 1000 mm Depth: 225 mm Height: 120 mm	Width: 1000 mm Depth: 300 mm Height: 150 mm
Weight	7.2 kg	15 kg	25 kg
Number of fixations	3 pcs	5 pcs	5 pcs
Type of fixation	Screw bolt and plug Inox A2 Ø10 mm - Length = 120 mm Drill hole Ø plug = 14 mm Sw: 17 mm 	Concrete screw Zinc coated Ø17 mm - Length = 135 mm Drill hole Ø screw = 14 mm Sw: 19 mm 	
Maximum weight of vehicle	5 ton	25 ton	40 ton



REFERENCE LIST - WHEEL STOP

<p>Wheel Stop S 1000x140x75mm (3 fixations) - BL</p>	<p>WS0750-0140-1000BL</p>		<p>Rear side</p>
<p>Wheel Stop M 1000x200x110mm (5 fixations) - BL</p>	<p>WS1100-0200-1000BL</p>		<p>Rear side</p>
<p>Wheel Stop L 1000x300x150mm (5 fixations) - BL</p>	<p>WS1500-0300-1000BL</p>		<p>Rear side</p>